
MAYDAY

design GI-RA




antoniolupi


MADE IN ITALY

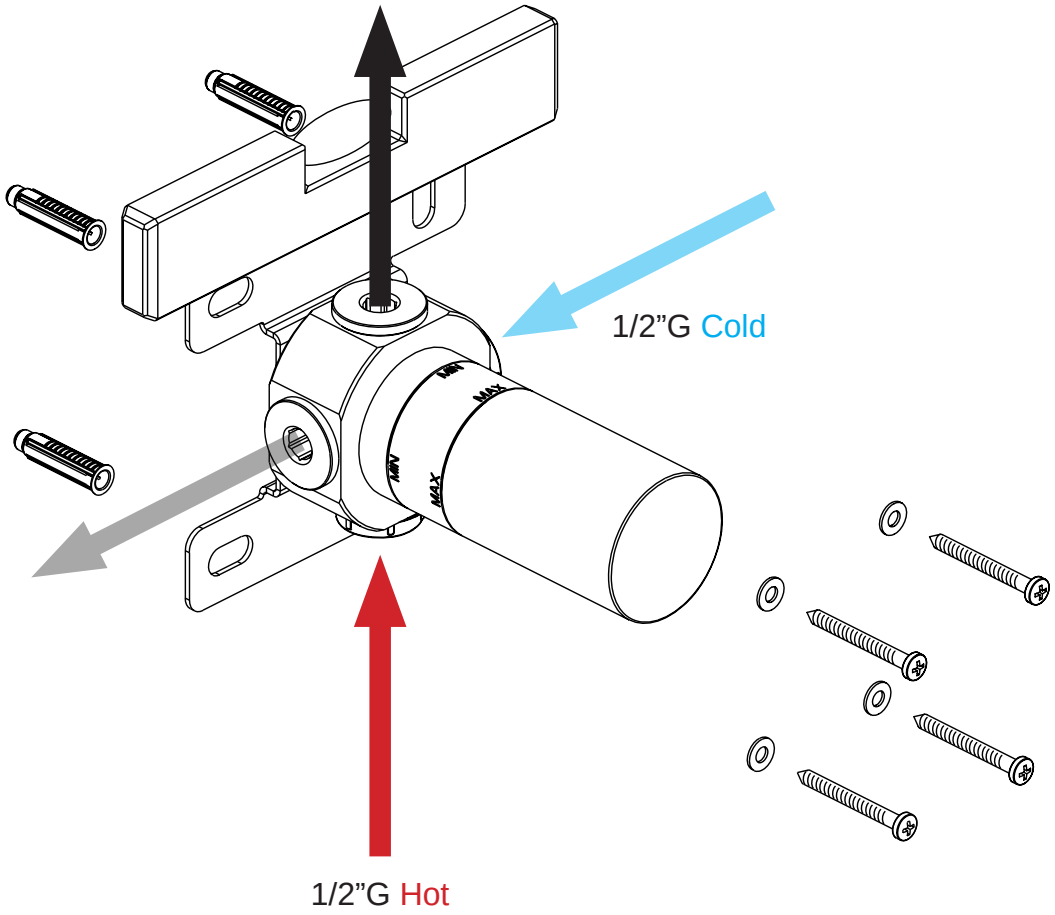


Position the concealed valve in the wall as per the diagram above, make sure that the entrance of hot water is below. Fix it with adequate screws.

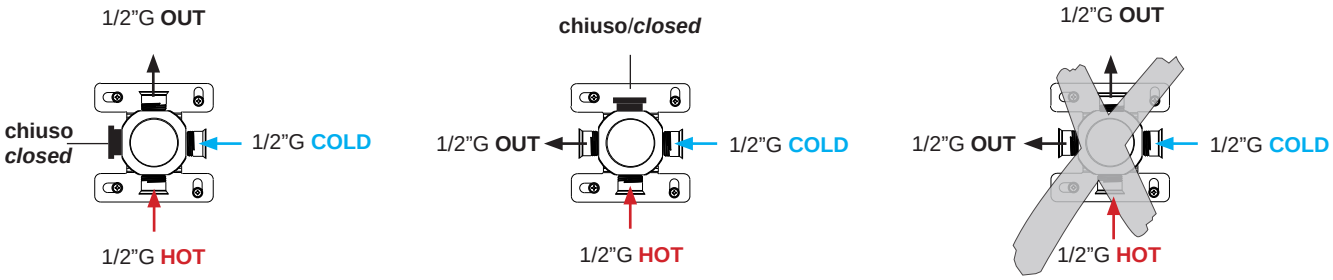


Install so that only one way is open, either up or left. It is not possible to have both active.

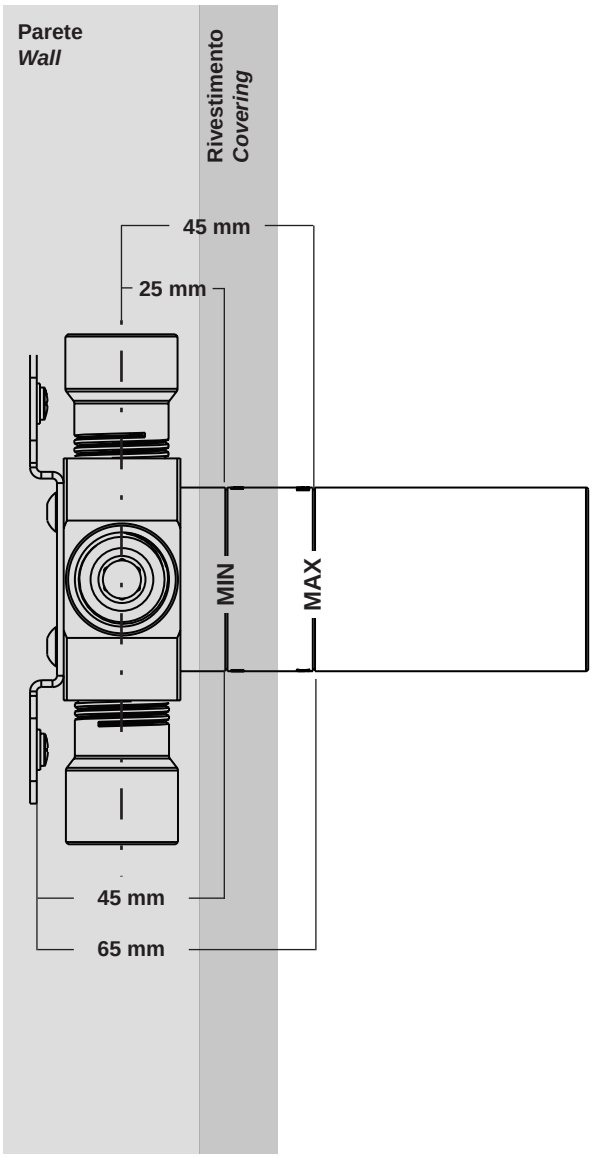

Apply the wall covering without removing the protective cover paying attention to the minimum and maximum measurements allowed.

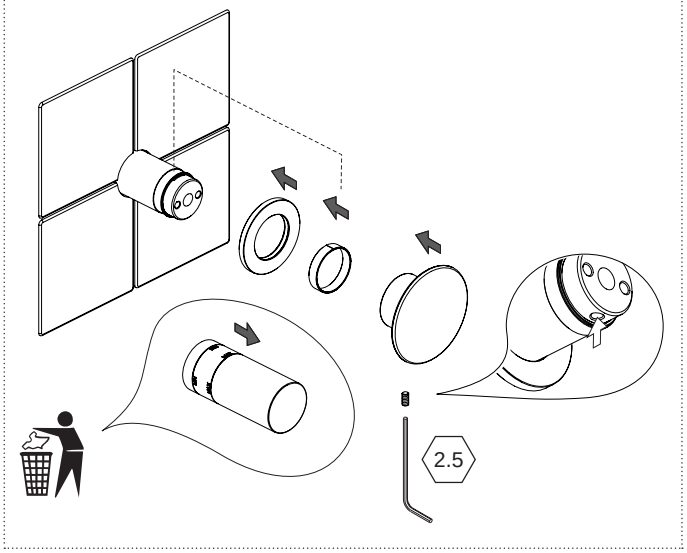

Remove the protective cover and assemble the tap as shown in the diagram. Tighten the grain with the tool provided to fix the components.

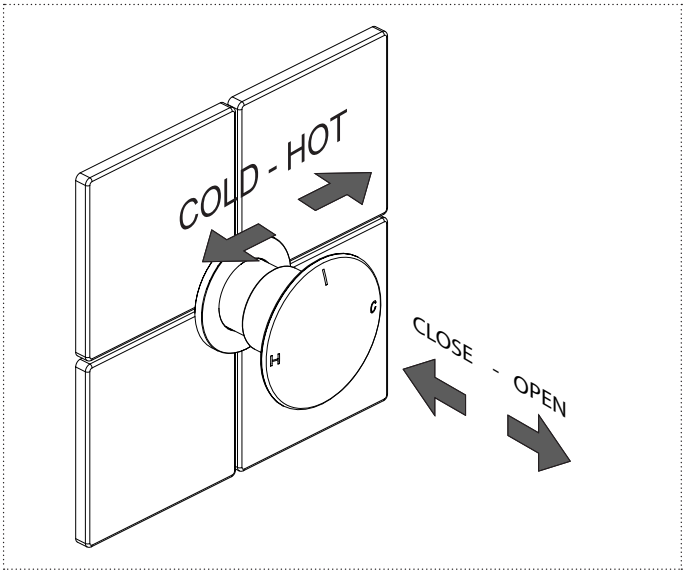

To o pen the tap pull the handle outwards and rotate left for cold water and right for hot water. To interrupt the flow of water push the handle inwards.

- Advised operating pressure 2 – 4 bar
- Maximum testing pressure 5 – 7 bar
- Maximum hot water temperature 80° C.
- Advised temperature 60°C.
- Pressure difference between hot and cold water 1,5 bar.

Filter installation at the beginning of the piping system as well as installation of all filters provided with the tap
P.S. if the above mentioned conditions are not met the product could malfunction or not perform adequately.
Eventual abnormal defects of the finish (i.e. scratches) should be noted prior to installation. If communicated to the company after installation the claim cannot be accepted.

IMPORTANT
For cleaning consult the technical data sheet downloadable from our website www.antoniolupi.it

antoniolupi
73
VIA MAZZINI
75

Antonio Lupi Design S.p.A.
via Mazzini 73/75 - 50050 Stabbia
Cerreto Guidi (Firenze) - Italy
T +39 0571 586881_95651
F +39 0571 586885
www.antoniolupi.it
lupi@antoniolupi.it