
SEGRETO

design AL Studio




antoniolupi


MADE IN ITALY

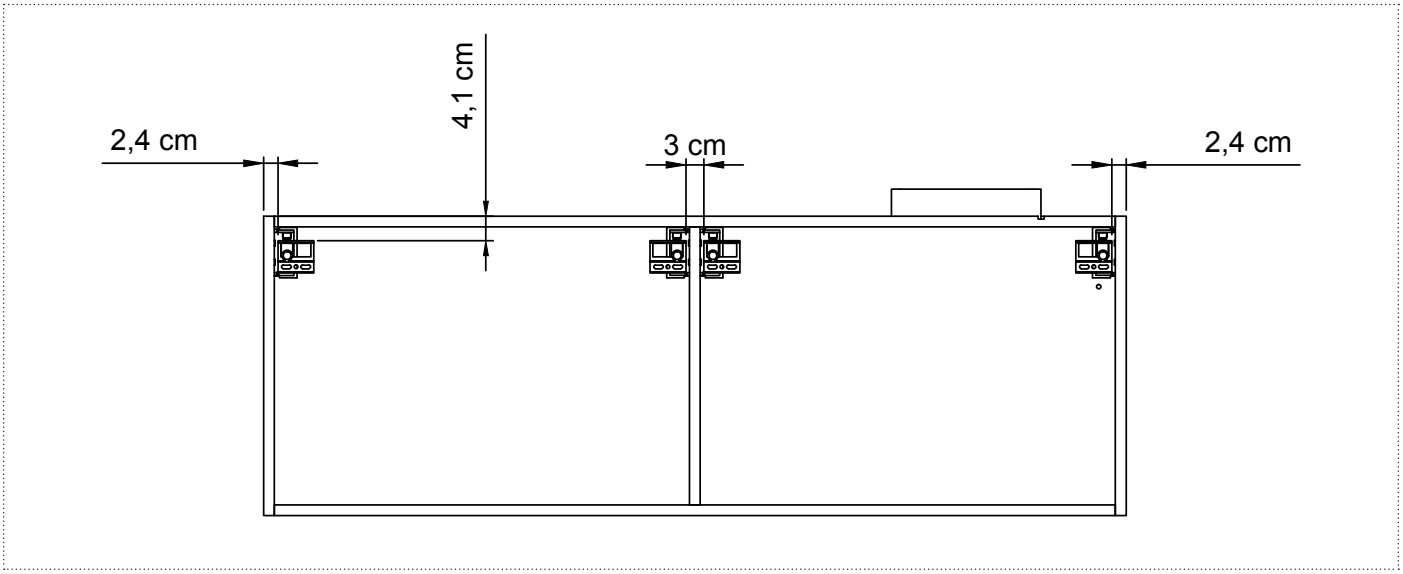


1_ Position and fix the supporting plates to the wall to the relevant measurements

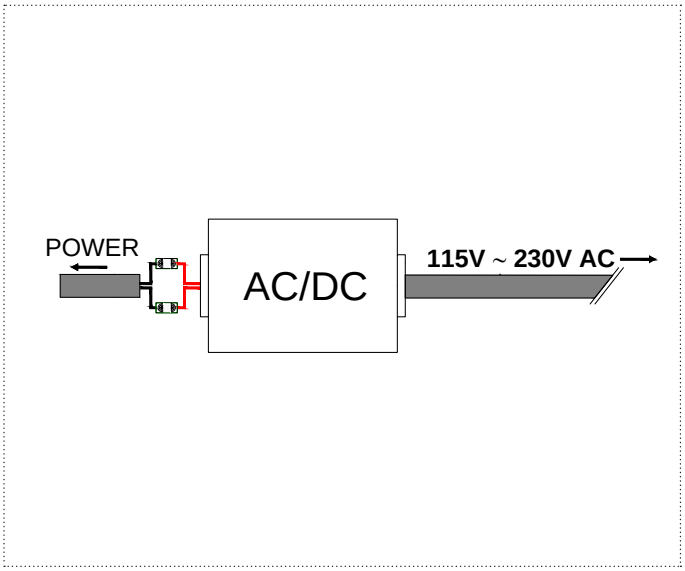


2_ Make the necessary connection to the power supply

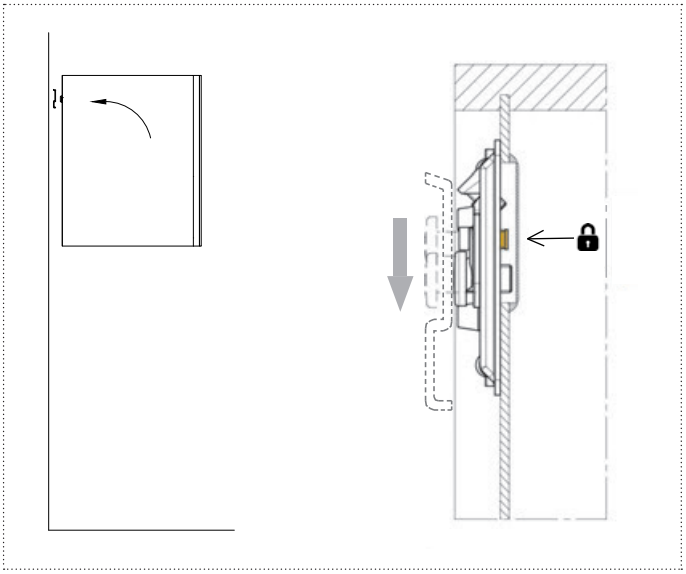


3_ Hang the furniture to the wall, then proceed with tightening of the screws shown to activate the anti-release system.

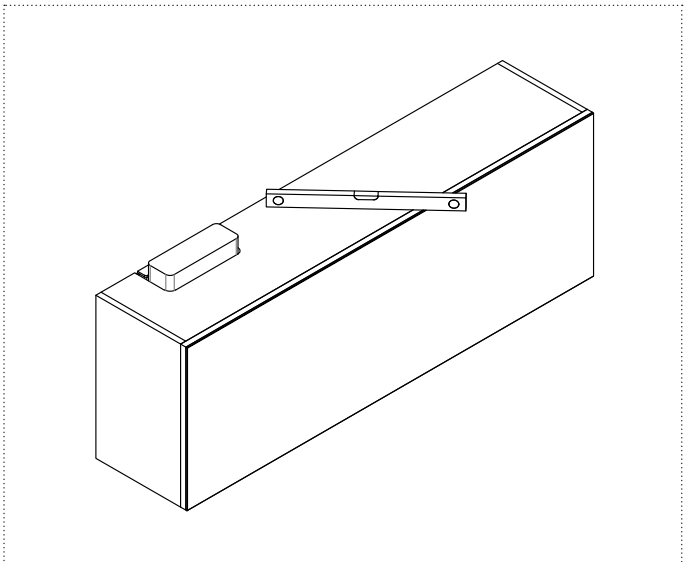


4_ Level the cabinet

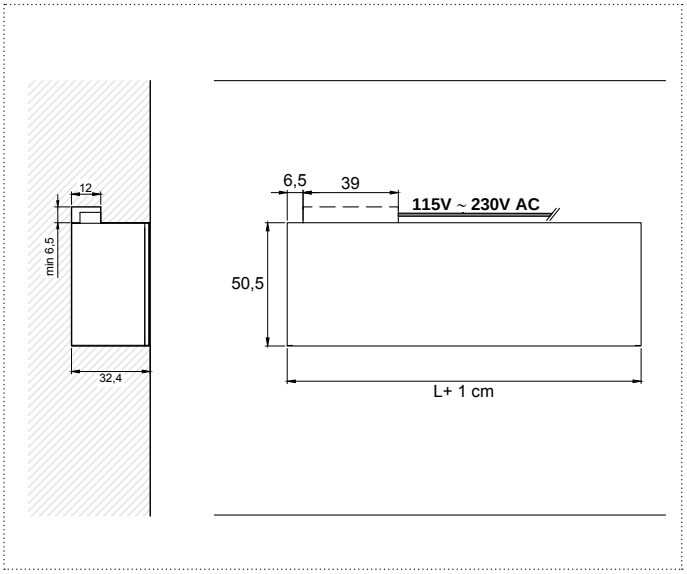


1_ Dimension of recessed area _**A**

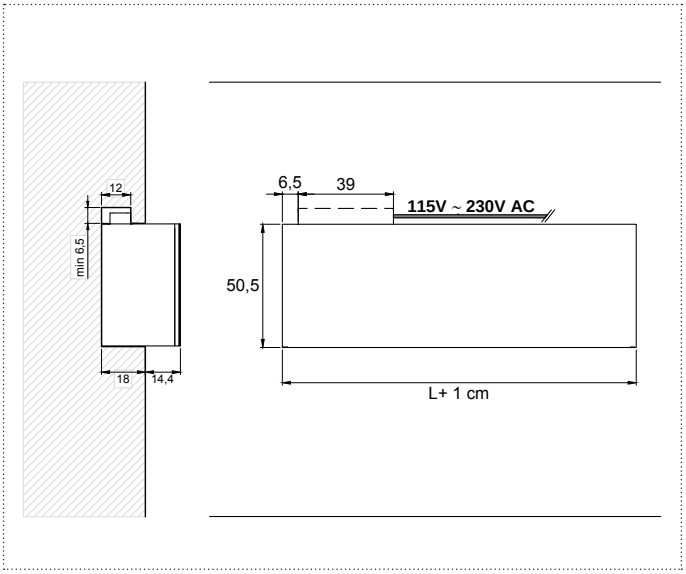


2_ Dimension of recessed area _**B**

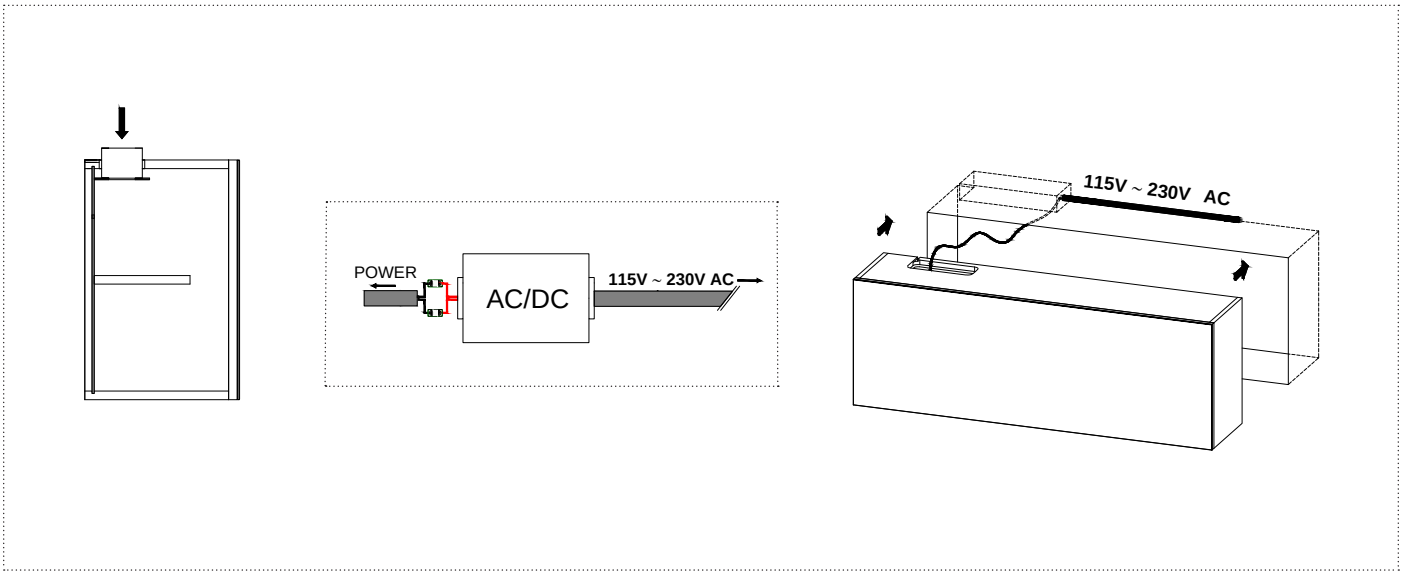


3_ Make the necessary connection to the power supply and then remove the transformer from its place and encase the furniture within the recessed area.

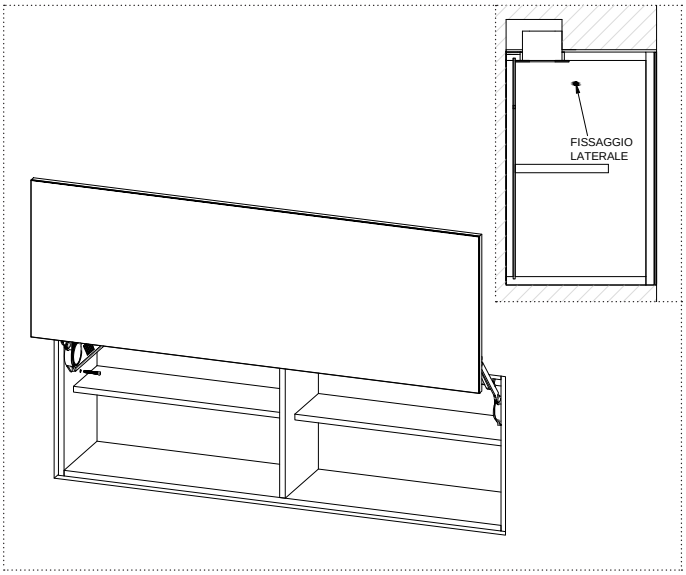


4_ Fix the cabinet to the wall using the screws provided and follow the pre-drilled holes in the side panels

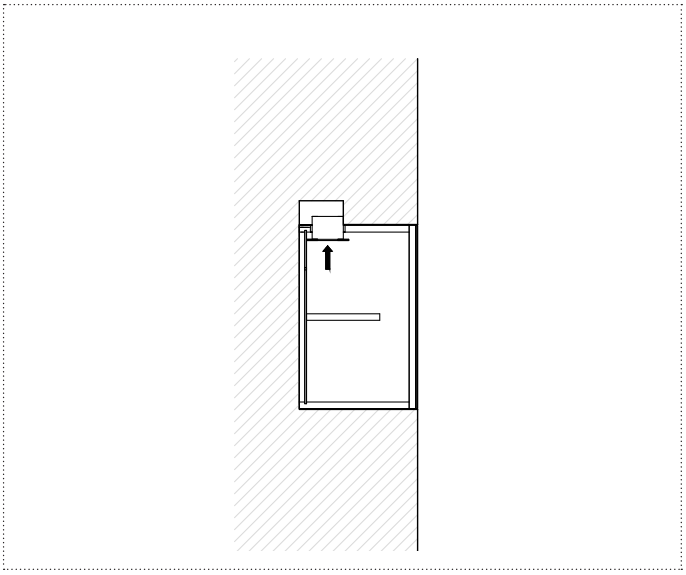


5_ Reposition the transformer in its place.

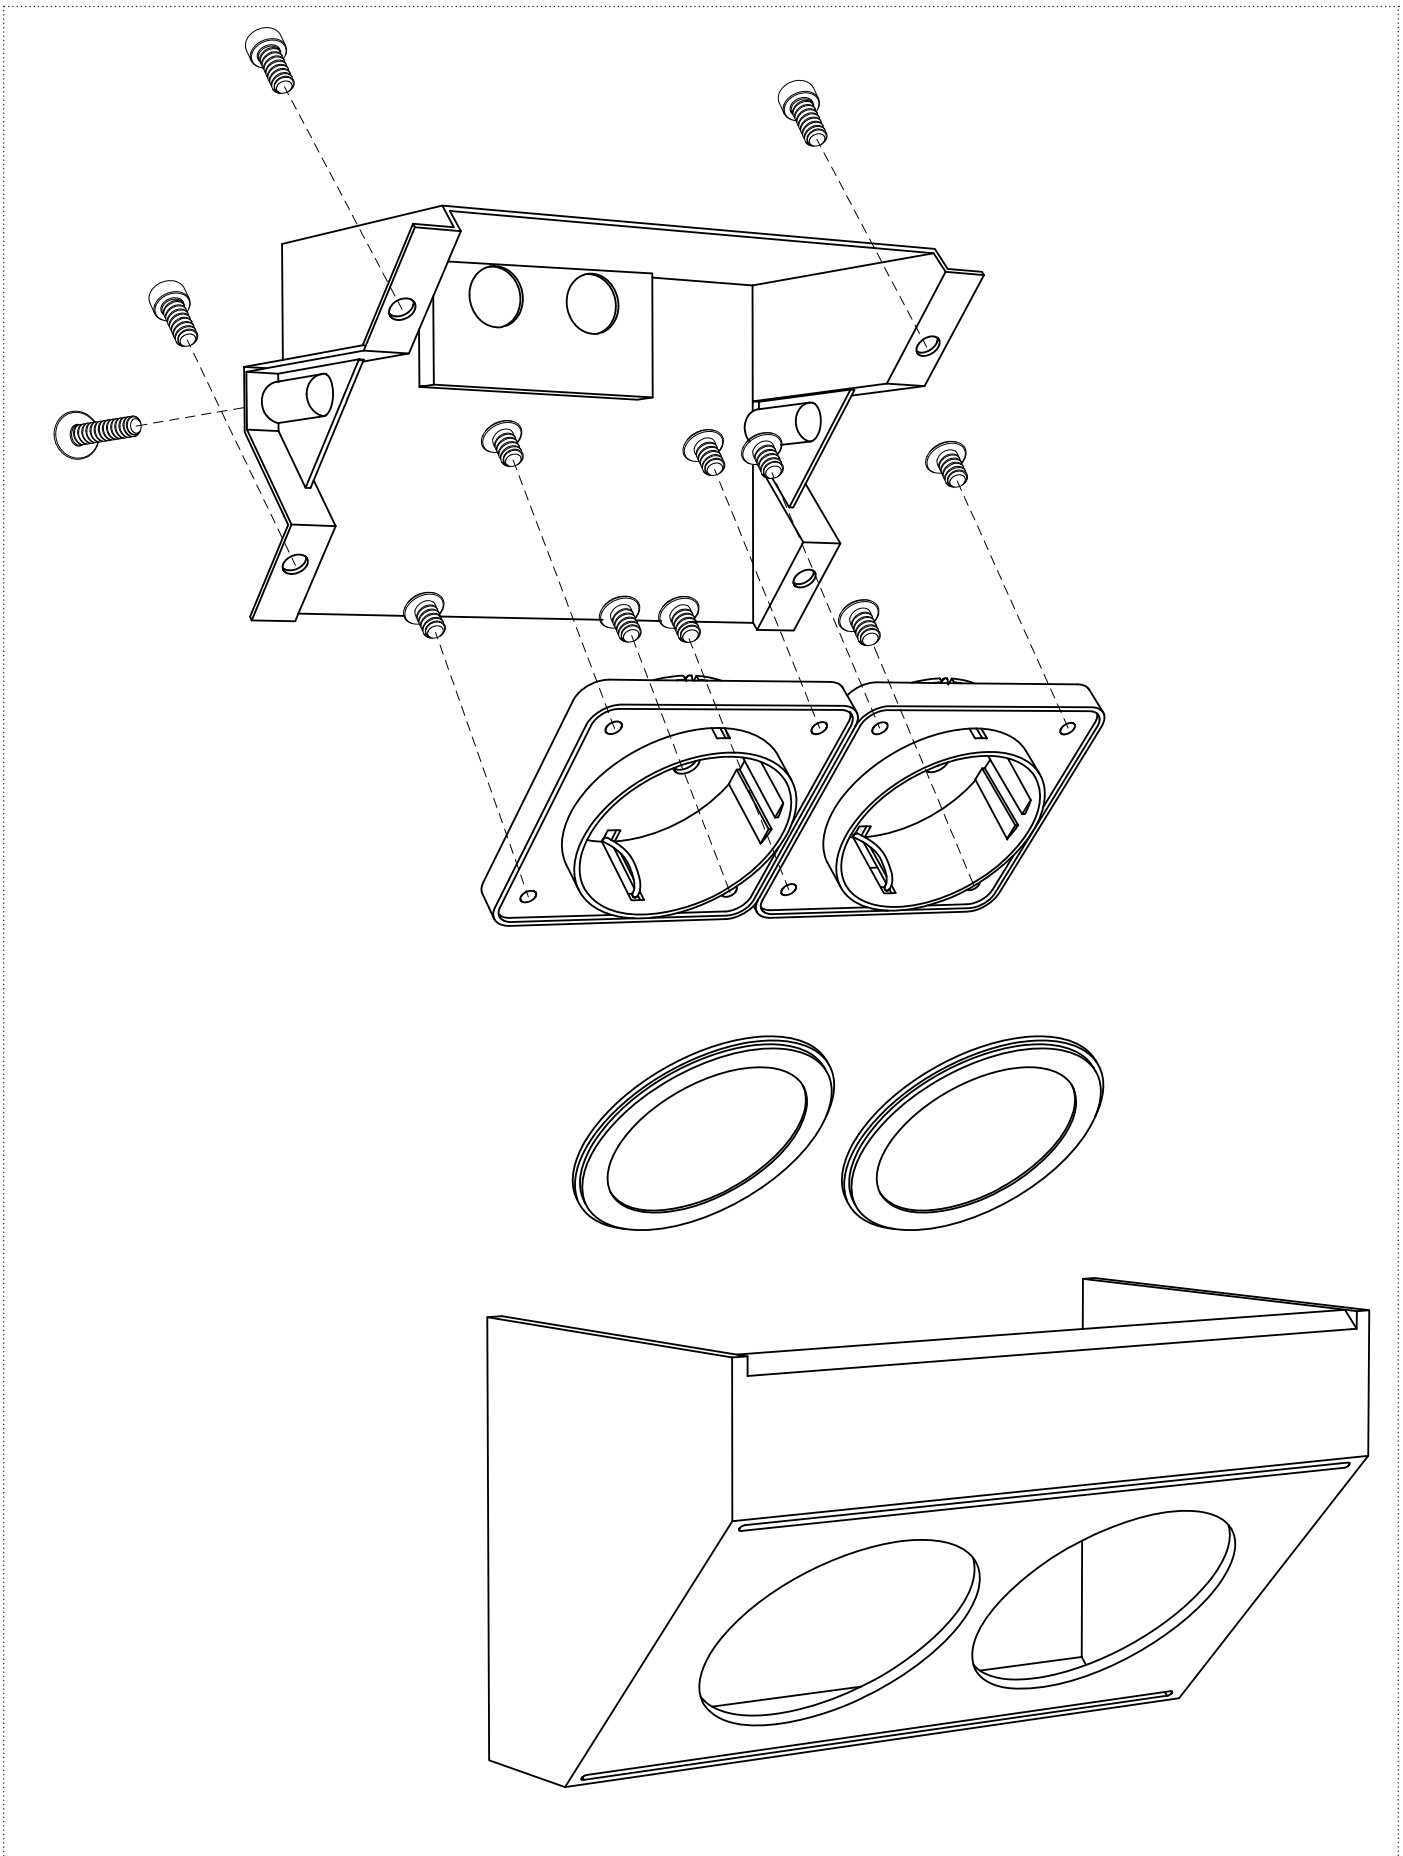


P.S: Items supplied with the socket. Consider these instructions only if you ordered the cabinet Art. SEGRETO with Art. PRESA / PRESACH / PRESAUK.

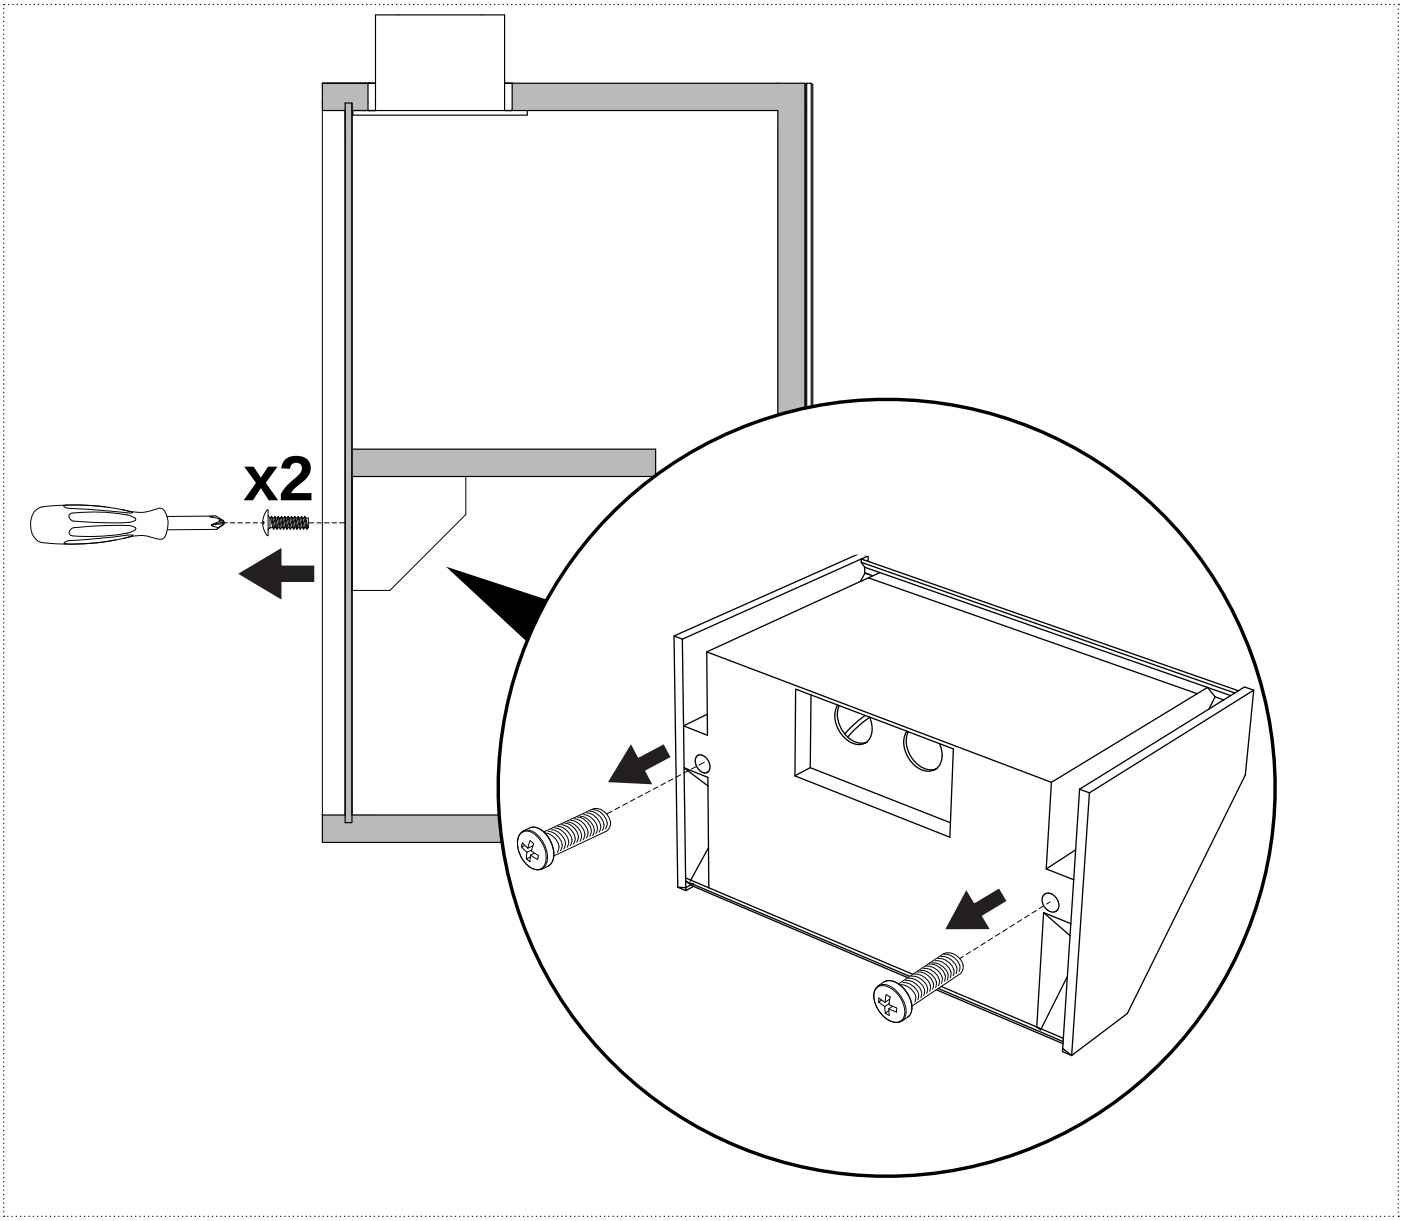


1_ Unscrew the two screws from the back of the cabinet to release the socket.

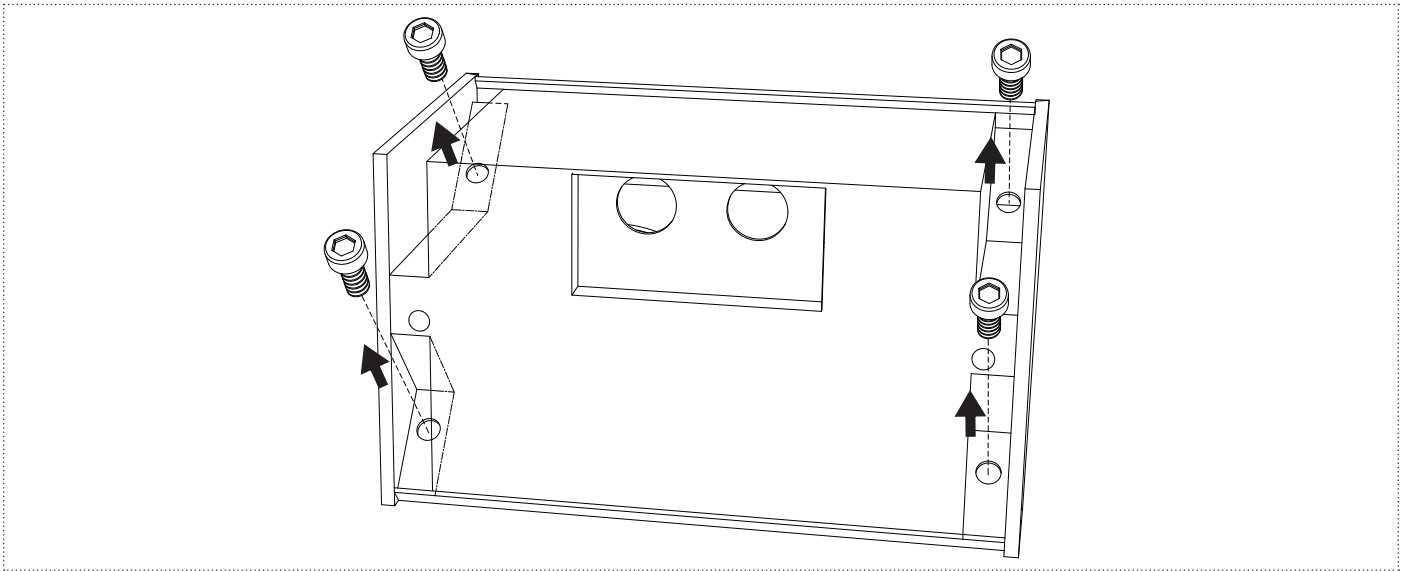


2_ Remove the support mask by unscrewing the 4 screws.

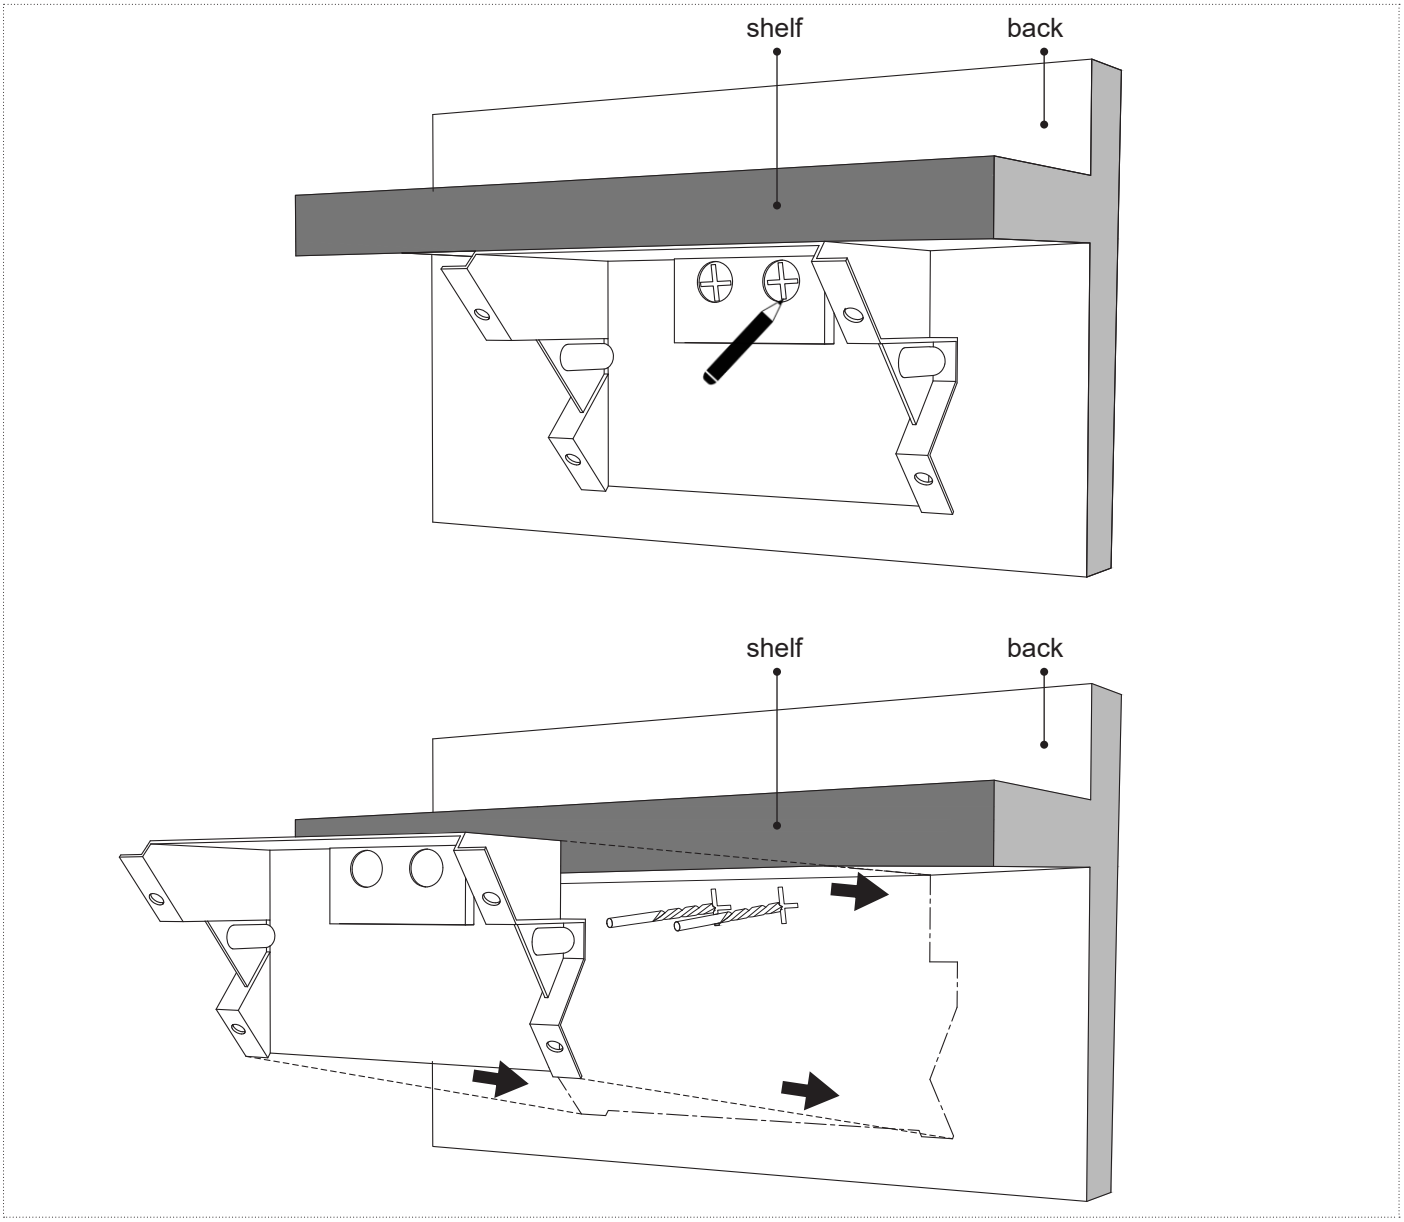


3_ Mark the drilling points on the back of the cabinet, remove the support mask, drill and put it back on.

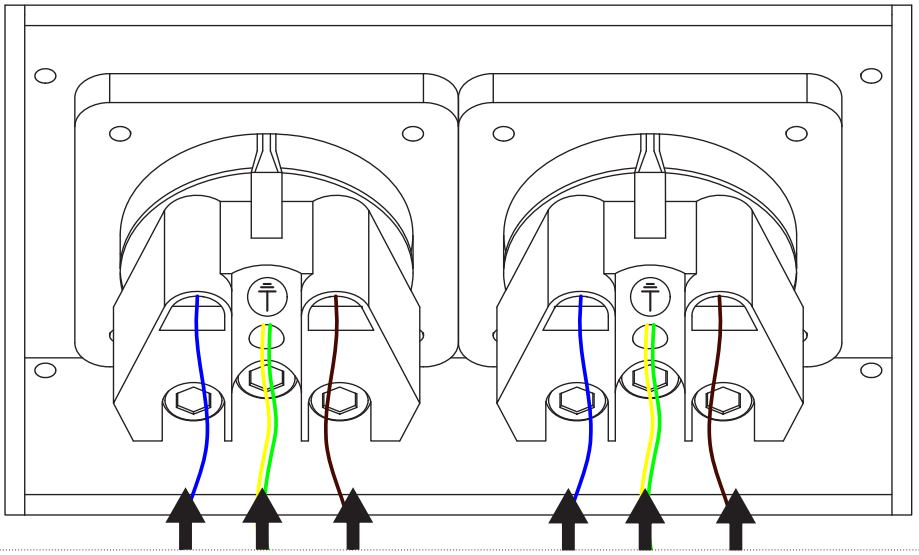

4_ Pass the power cables through the holes and make the connection between the socket and the electrical line

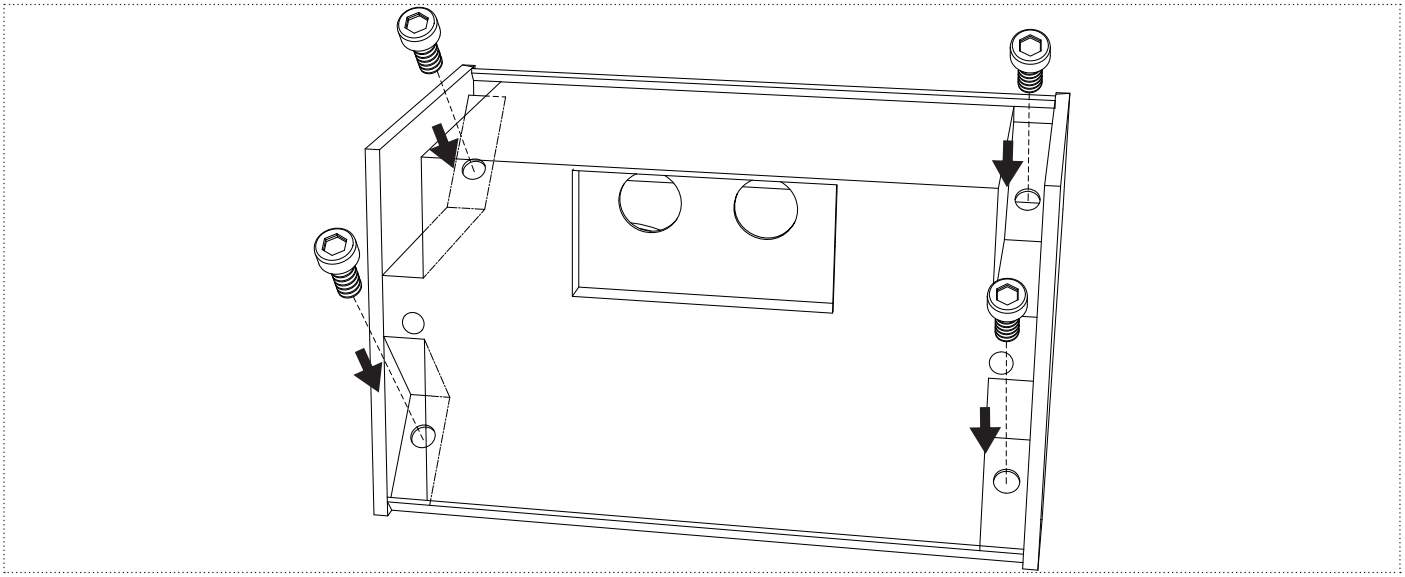

5_ Tighten the support mask by tightening the 4 screws

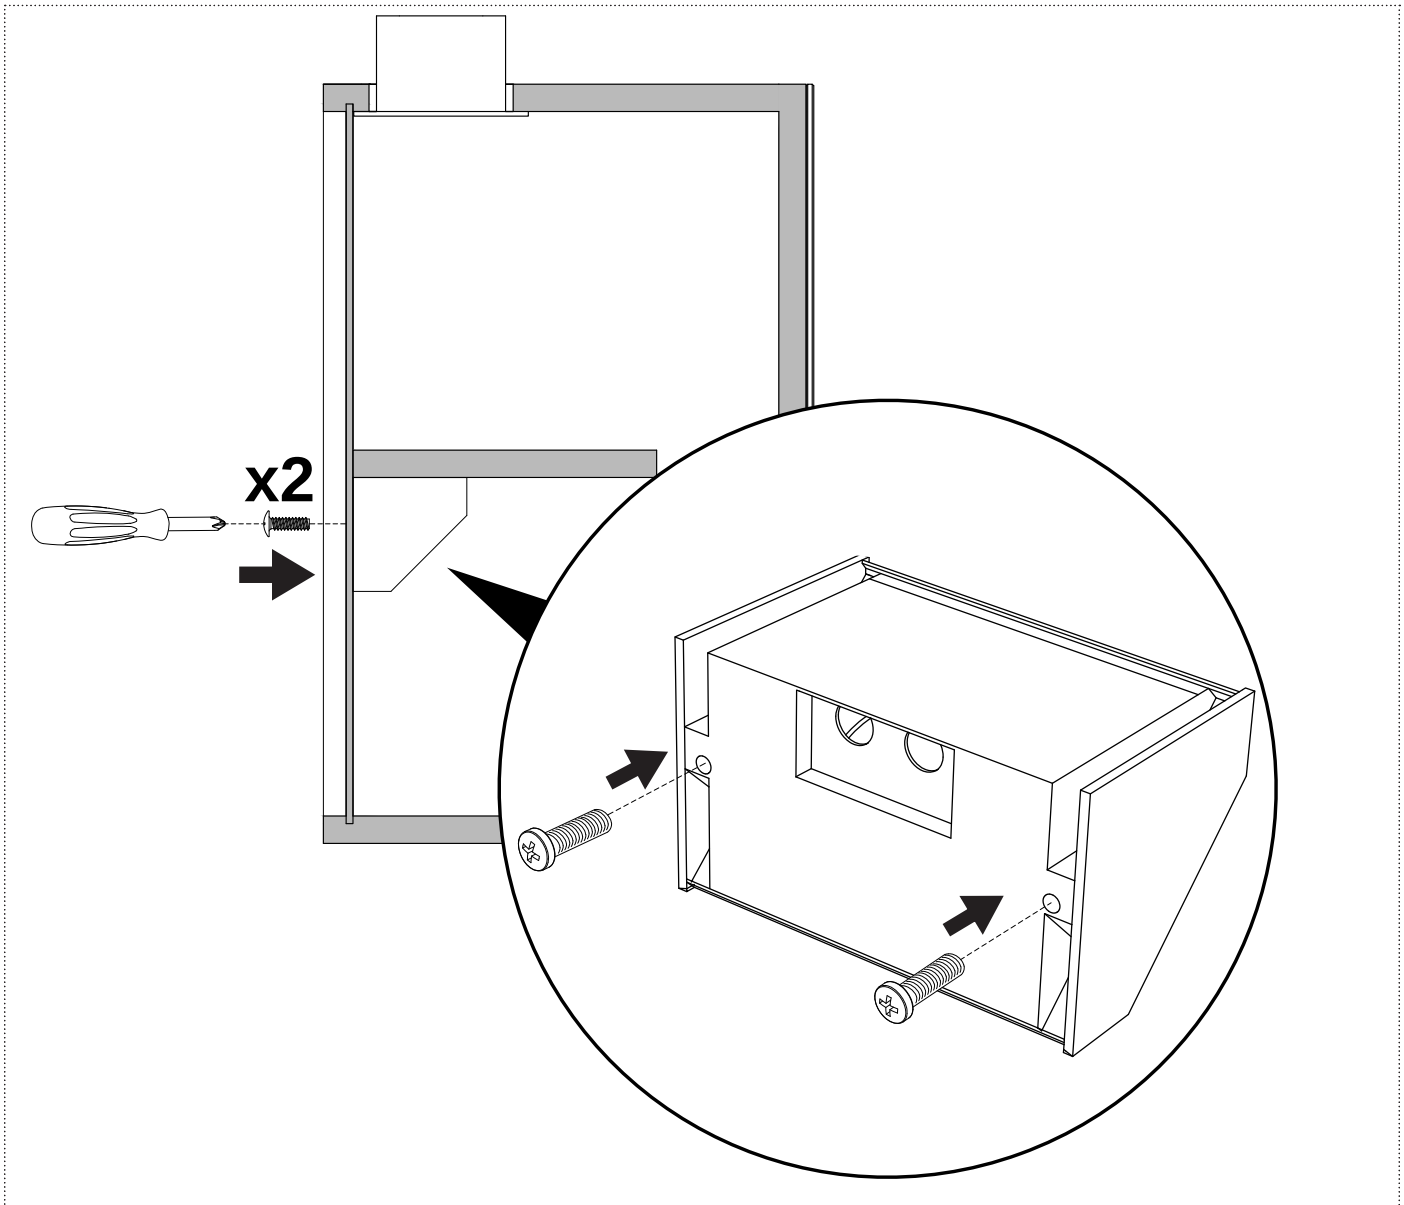

6_ Screw the two screws on the back of the cabinet to secure the grip.

READ CAREFULLY THE INSTRUCTIONS GIVEN IN THE FOLLOWING MANUAL
Keep rigorously to the indications given in the manual for proper maintenance of the product.
POSITIONING
For internal use only.
The position of the wall cabinet must not be less than 0.6m from the shower enclosure or bathtub.
To hang the wall cabinet do not use other supports than those supplied.
Do not install the wall cabinet near heated sources like radiators, heaters or other similar sources.
The installation of the wall cabinet requires qualified personnel.
INSTALLATION
Terminal block not included.
To connect the electrical parts, the support of qualified personnel with electrotechnical experience is required.
When installing the sink you must use adequate tools.
During installation it is necessary to pay close attention to the risk of electrical shock.
We recommend the installation of a bipolar switch to allow the electrical sectioning of the circuit.
Make the electrical connections as per the descriptive diagram in the present manual.
USE
The wall cabinet must be used only if complete with all its elements.
Do not modify or alter the original conditions of the wall cabinet. Any tampering can compromise its safety.
Do not use the wall cabinet for other purposes than what it is intended for.
To reduce the risk of electrical shock do not remove any covers from the wall cabinet.
MAINTENANCE
For every sign of wear or malfunctoning call immediately the company Antonio Lupi Design S.p.A.
All components of the sink must be promptly replaced in the event of damage.
The light source contained in this product must be replaced only by the manufacturer or by equally qualified personnel.
REMOVAL AND DISPOSAL
During the removal of the product, all necessary precautions must be taken to avoid the risk of electric shock.
The removed product must then be disposed of according to all legal requirements as special waste.

Art. PRESA / Art. PRESACH / Art. PRESAUK
The company Antonio Lupi spa is not responsible for the correct installation of the sockets in the drawers.
When installing the switches, it is necessary to comply with all the necessary precautions in order to perform a correct installation.
The recommendations below are for your information and precautionary purposes only, if the following recommendations conflict with the applicable standards in the country of installation, the standards always have priority over the recommendations provided.
The installation must be carried out with all the necessary precautions so as not to endanger people, things and animals.
INSTALLATION:
The sockets must be installed according to the manufacturer's instructions, considering the characteristics of the environment, the furniture and the applicable electrical standards.
When installing, all the necessary precautions must be taken to protect against direct or indirect contact with parts that are in tension.
When installation is terminated, add a sign indicating the maximum power that can be supplied in a position that is clearly visible to the user together with all the additional information necessary for correct use.
The electrical cables used for installation must be double insulated and must have a section suitable for the intended use. As a matter of precaution, we recommend cables with a section of not less than 2.5mm2.
VERIFICATION:
At the end of the installation, carry out all the visual examinations to ensure that the components and connections comply with the applicable safety requirements. Furthermore, all the necessary tests must be carried out to ensure that the installation complies with all the safety criteria necessary to guarantee the safety of people, things and animals.
USE:
Absolutely avoid storing, with the socket connected, all electrical appliances that can produce an excessive temperature in an enclosed space such as hair dryers, lighting devices and / or similar.
Do not use the socket for the use of large appliances such as washing machines, dryers and similar.
Do not leave appliances unattended if they are plugged into the socket.
Do not exceed the maximum power that can be supported by the electrical circuit shown on the sign placed by the installer.
If overheating is found during use, stop any activity and contact the installer immediately.



EN_This product contains a light source with energy efficiency class < F >

antoniolupi
73
VIA MAZZINI
75

Antonio Lupi Design S.p.A.
via Mazzini 73/75 - 50050 Stabbia
Cerreto Guidi (Firenze) - Italy
T +39 0571 586881_95651
F +39 0571 586885
www.antoniolupi.it
lupi@antoniolupi.it