INTRECCIO

design Paolo Ulian




antoniolupi

MADE IN ITALY




1_ Position the column of the sink and with a pencil trace the base

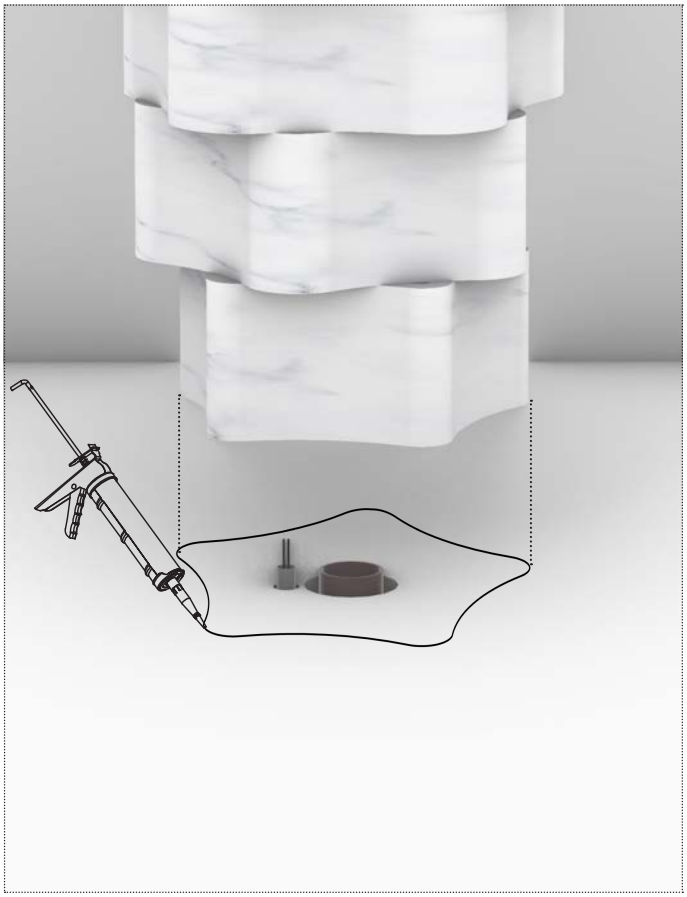


2_ Remove the article and fix with either silicone or glue depending on the type of floor.




3_ Subsequently, place silicone on the top of the column.

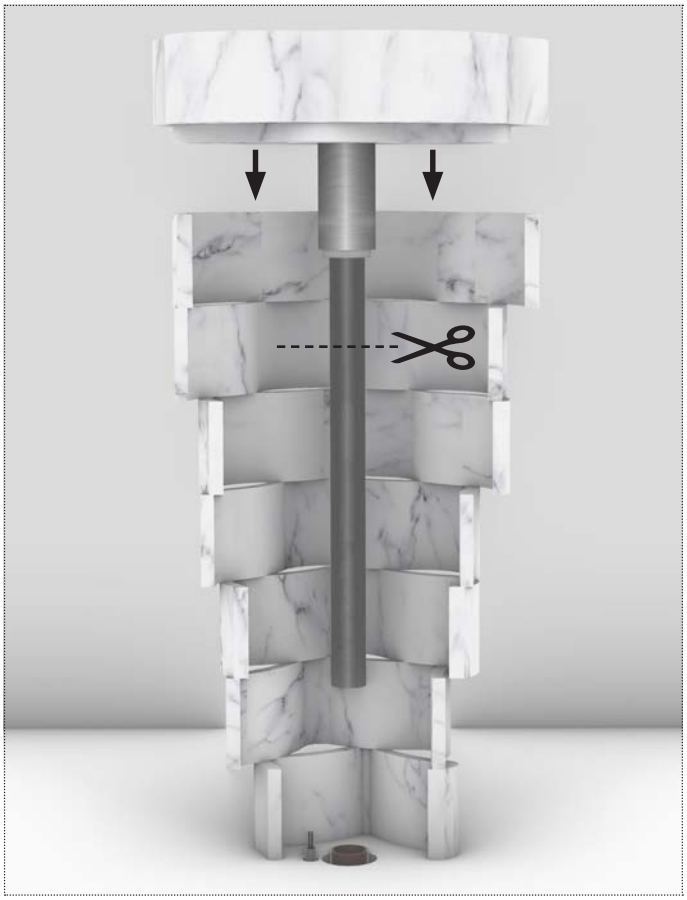


4_ Cut the provided drain pipe to measure and connect it to the siphon. Lastly rest the sink on the column.

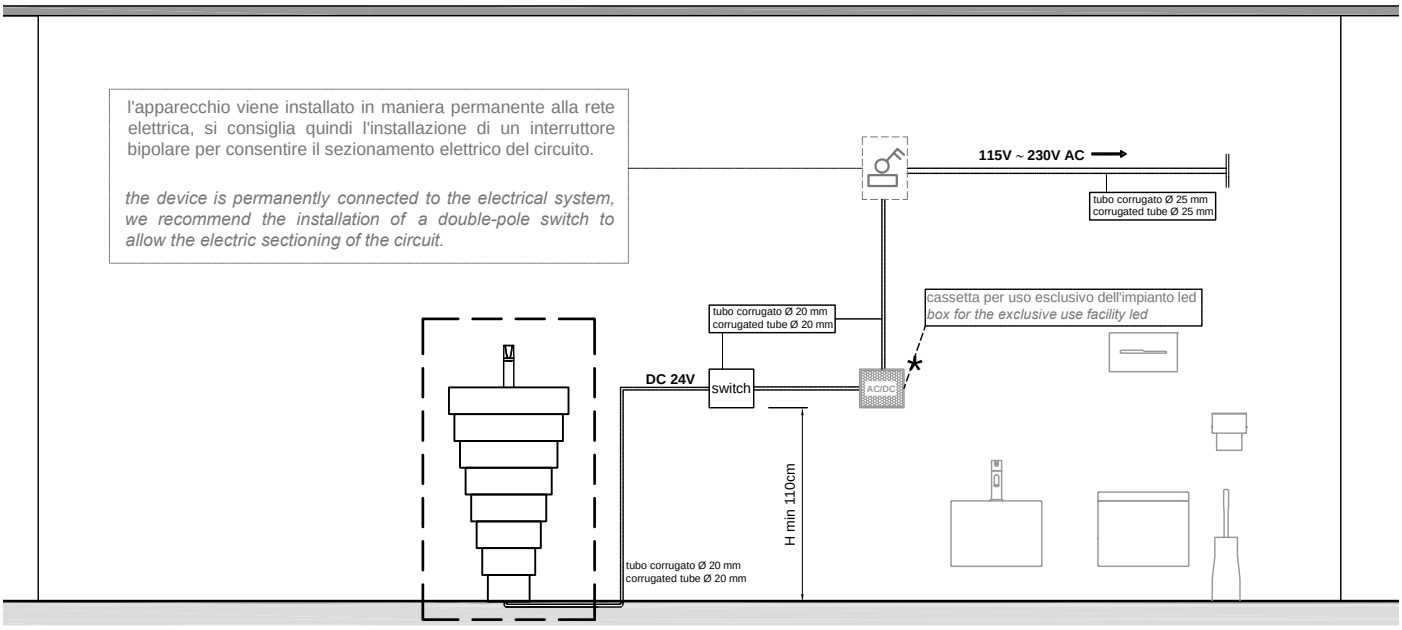

*Collegare i cavetti dell'apparecchio negli appositi morsetti dell'alimentatore rispettando la polarità.
Connect the cables to the appropriate terminals of the power supply, respecting the polarity.

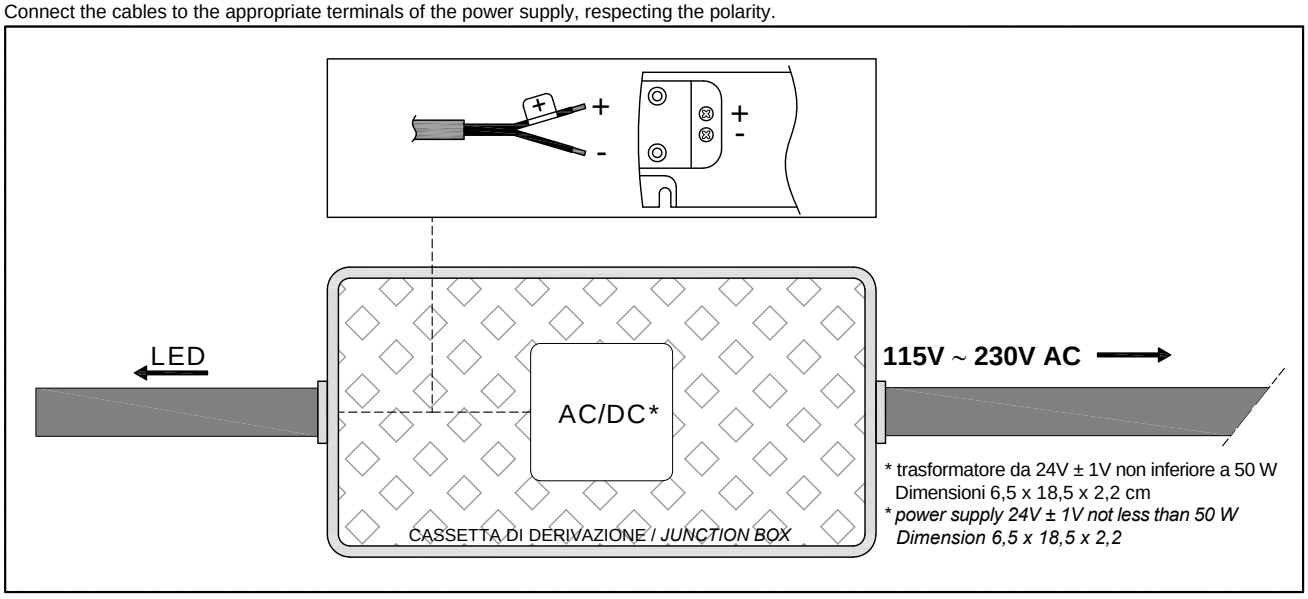

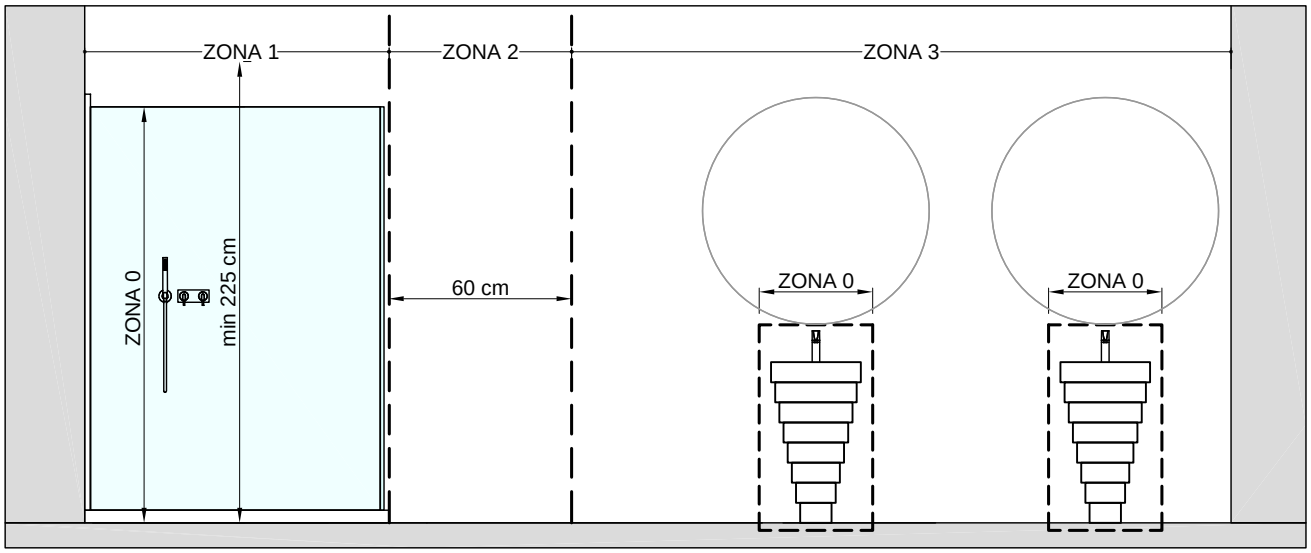

NB: Predisporre un collegamento IP68 (non presente in dotazione, a cura dell'installatore) per la fonte luminosa, inserire quindi il cavo in eccesso all'interno della forassite e siliconare la parte superiore a chiusura.
P.S.: Prepare an IP68 connection by the installer (not provided) for the light source, then insert the excess cable inside the hole and seal the upper part with silicone.

READ CAREFULLY THE INSTRUCTIONS GIVEN IN THE FOLLOWING MANUAL
Keep rigorously to the indications given in the manual for proper maintenance of the product
POSITIONING
For internal use only. Do not install the sink near heated sources like radiators, heater or other similar sources
The installation of the sink requires qualified personnel.
INSTALLATION
To connect the electrical parts, the support of qualified personnel with electrotechnical experience is required
Termal block not included. When installing the sink you must use adequate tools. During installation it is necessary to pay close attention to the risk of electrical shock. We recommend the installation of a bipolar switch to allow the electrical sectioning of the circuit.
When installing the sink, it is recommended to make the drain and tap connections with electrically insulated pipes; verify the resistance of the metal parts of the sink to the ground to determine if an equipotential connection must be made. Make the electrical connections as per the descriptive diagram in the present manual.
USE
Do not modify or alter the original conditions of the sink. Any tampering can compromise its safety. Do not use the sink for other purposes than what it is intended for. The sink must be used only if complete with all its elements. No flame sources, such as lighted candles, should be placed on the sink.
MAINTENANCE
For every sign of wear or malfunctoning call immediately the company Antonio Lupi Design S.p.A.
All components of the sink must be promptly replaced in the event of damage.
The light source contained in this product must be replaced only by the manufacturer or by equally qualified personnel.
REMOVAL AND DISPOSAL
During the removal of the product, all necessary precautions must be taken to avoid the risk of electric shock.
The removed product must then be disposed of according to all legal requirements as special waste.
POWER SUPPLY:
A power supply with the following specifications must be used with the sink:
Input: 230V 50Hs Classe 2;
Output: Classe 3, SELV, 24Vdc
The nominal power of the power supply must be greater than that indicated on the product.



EN_This product contains a light source with energy efficiency class < E >

IMPORTANT
For cleaning consult the technical data sheet downloadable from our website www.antoniolupi.it

antoniolupi
73
VIA MAZZINI
75

Antonio Lupi Design S.p.A.
via Mazzini 73/75 - 50050 Stabbia
Cerreto Guidi (Firenze) - Italy
T +39 0571 586881_95651
F +39 0571 586885
www.antoniolupi.it
lupi@antoniolupi.it